SET-UP KAMADO CLASSIC B.

PART NUMBERS

VGK-BRACKET


KSS TMT-1

KSS HDL-1

KSS WHL-4


KSS-FLT-1


KSS CG-1



Step 1: Cart Assembly


Flip cart upside down for easy assembly. Assemble cart by inserting two "X" connectors into leg ends, then screw in using the wrench provided. Place lock washer above flat washer over bolt before screwing through leg into "X" connector. Screw in casters and tighten nuts using wrench provided. While assembling, leave screws loose to allow adjustment in cart. Otherwise it can be difficult to get all of the screws in. After cart is assembled, confirm all bolts are tightened, then lift Kamado and set into cart with bottom vent centered between two legs.






Step 3: Grill Assembly

Take all parts out of grill before lifting. The grill is heavy and will require 2 people to lift it into cart and if possible a third person to help guide the kamado into cart. Using the shelf brackets as lift handles, lift grill and set it into cart. Place fire bowl inside the kamado and place cast iron grate into the fire bowl. Place cooking grate onto grill with hinged section facing towards front of grill. Close lid and press top vent onto top of kamado so spring clips are fully engaged, with calibrations facing the front of the grill.



Step 2: Shelf Bracket

Mount shelf brackets over studs on the sides of the metal bands on the bottom ceramic grill body with bracket slots facing up. Brackets are stamped on the back with letters indicating their position (e.g., LF=Left Front bracket and RB=Right Back bracket). Mount flat washer then acorn nut on each stud and tighten with wrench provided.




Step 4: Handle Assembly

Attach the handle by placing handle bracket over studs, opposite the hinge. On each stud use flat washer, then screw on acorn nut and tighten.


Step 5: Long-Term Maintenance


- 1. The Wood Side Shelves should be covered when not in use and may require refinishing from time to time.
- 2. Routinely check the Spring Assist Band to make sure the 2 5/8" bolts are tight and secure.



Step 1: Cart Assembly


Flip cart upside down for easy assembly. Assemble cart by inserting two "X" connectors into leg ends, then screw in using the wrench provided. Place lock washer above flat washer over bolt before screwing through leg into "X" connector. Screw in casters and tighten nuts using wrench provided. While assembling, leave screws loose to allow adjustment in cart. Otherwise it can be difficult to get all of the screws in. After cart is assembled, confirm all bolts are tightened, then lift Kamado and set into cart with bottom vent centered between two legs.





Step 3: Grill Assembly

Take all parts out of grill before lifting. The grill is heavy and will require 2 people to lift it into cart and if possible a third person to help guide the kamado into cart. Using the shelf brackets as lift handles, lift grill and set it into cart. Place fire bowl inside the kamado and place cast iron grate into the fire bowl. Place cooking grate onto grill with hinged section facing towards front of grill. Close lid and press top vent onto top of kamado so spring clips are fully engaged, with calibrations facing the front of the grill.




Step 2: Shelf Bracket

KAMADO

PROFESIONAL

SERIE

Mount shelf brackets over studs on the sides of the metal bands on the bottom ceramic grill body with bracket slots facing up. Brackets are stamped on the back with letters indicating their position (e.g., LF=Left Front bracket and RB=Right Back bracket). Mount flat washer then acorn nut on each stud and tighten with wrench provided.




Step 4: Handle Assembly

Attach the handle by placing handle bracket over studs, opposite the hinge. On each stud use flat washer, then screw on acorn nut and tighten.

Step 5: Long-Term Maintenance


- 1. The Wood Side Shelves should be covered when not in use and may require refinishing from time to time.
- 2. Routinely check the Spring Assist Band to make sure the 2 5/8" bolts are tight and secure.






Step 1: Cart Assembly

Flip cart upside down for easy assembly. Assemble cart by inserting two "X" connectors into leg ends, then screw in using the wrench provided. Place lock washer above flat washer over bolt before screwing through leg into "X" connector. Screw in casters and tighten nuts using wrench provided. While assembling, leave screws loose to allow adjustment in cart. Otherwise it can be difficult to get all of the screws in. After cart is assembled, confirm all bolts are tightened, then lift Kamado and set into cart with bottom vent centered between two legs.




Step 3: Grill Assembly

Take all parts out of grill before lifting. The grill is heavy and will require 2 people to lift it into cart and if possible a third person to help guide the kamado into cart. Using the shelf brackets as lift handles, lift grill and set it into cart. Place fire bowl inside the kamado and place cast iron grate into the fire bowl. Place cooking grate onto grill with hinged section facing towards front of grill. Close lid and press top vent onto top of kamado so spring clips are fully engaged, with calibrations facing the front of the grill.



Step 2: Shelf Bracket

Mount shelf brackets over studs on the sides of the metal bands on the bottom ceramic grill body with bracket slots facing up. Brackets are stamped on the back with letters indicating their position (e.g., LF=Left Front bracket and RB=Right Back bracket) Mount flat washer then acorn nut on each stud and tighten with wrench provided.




Step 4: Handle Assembly

Attach the handle by placing handle bracket over studs, opposite the hinge. On each stud use flat washer, then screw on acorn nut and tighten.

5/8" bolts are tight and secure.

PART NAMES

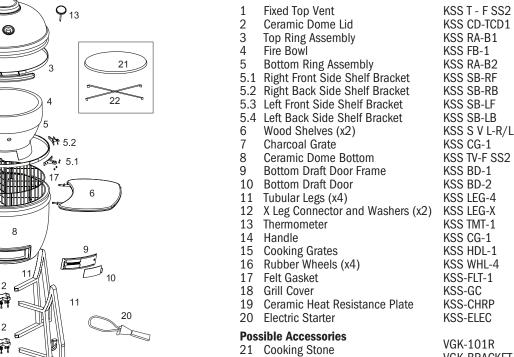

NAMES	PART NUMBERS	
Fixed Top Vent	KSS T - F SS2	
Ceramic Dome Lid	KSS CD-TCD1	
op Ring Assembly	KSS RA-B1	
Fire Bowl	KSS FB-1	

KSS TV-F SS2

KSS BD-1

KSS BD-2

KSS LEG-4

KSS TMT-1

KSS CG-1

KSS HDI -1

KSS WHL-4

KSS-FLT-1

KSS-GC

KSS-CHRP

KSS-ELEC

VGK-101R

VGK-BRACKET

Bottom Ring Assembly 5.1 Right Front Side Shelf Bracket KSS SB-RF 5.2 Right Back Side Shelf Bracket KSS SB-RB 5.3 Left Front Side Shelf Bracket KSS SB-LF 5.4 Left Back Side Shelf Bracket KSS SB-LB Wood Shelves (x2) KSS S V L-R/L KSS CG-1

12 X Leg Connector and Washers (x2) KSS LEG-X

Tubular Legs (x4)

13 Thermometer

15 Cooking Grates

20 Electric Starter

Possible Accessories

21 Cooking Stone

22 SS Stone Bracket

16 Rubber Wheels (x4)

19 Ceramic Heat Resistance Plate

14 Handle

17 Felt Gasket

18 Grill Cover

Charcoal Grate Ceramic Dome Bottom Bottom Draft Door Frame Bottom Draft Door

Step 5: Long-Term Maintenance

- 1. The Wood Side Shelves should be covered when not in use and may require refinishing from time to time.
- 2. Routinely check the Spring Assist Band to make sure the 2

PART NAMES **PART NUMBERS** Fixed Top Vent Ceramic Dome Lid KSS CD-TCD1 KSS RA-B1 Top Ring Assembly KSS FB-1 Fire Bowl KSS RA-B2 Bottom Ring Assembly 5.1 Right Front Side Shelf Bracket KSS SB-RF 5.2 Right Back Side Shelf Bracket KSS SB-RB KSS SB-LF 5.3 Left Front Side Shelf Bracket 5.4 Left Back Side Shelf Bracket KSS SB-LB Wood Shelves (x2) KSS S V L-R/L Charcoal Grate KSS CG-1 KSS TV-F SS2 Ceramic Dome Bottom Bottom Draft Door Frame KSS BD-1 10 Bottom Draft Door KSS BD-2 KSS LEG-4 11 Tubular Legs (x4) 12 X Leg Connector and Washers (x2) KSS LEG-X

22 SS Stone Bracket

13 Thermometer

15 Cooking Grates

22 SS Stone Bracket

17 Felt Gasket

16 Rubber Wheels (x4)

14 Handle

10	GIIII COVEI	N33-GC
19	Ceramic Heat Resistance Plate	KSS-CHRP
20	Electric Starter	KSS-ELEC
Possible Accessories		VOV 101D
21	Cooking Stone	VGK-101R
22	SS Stone Bracket	VGK-BRACKET